Han® GND



Contents	Page
Description of the Han® GND system	42.02
Technical characteristics	42.03
Han® GND	42.04
Assembly	42.06




Han® GND – Mateable Potential Equalization

The new Han® GND series now enables pluggable grounding systems

Han® GND (Han® Ground) is the innovative HARTING solution for potential equalization. The new connector series makes it possible to execute grounding systems in a pluggable design for the first time.

The use of connectors has been well-established in the electrical cabling of machines and systems for many years. The advantage is quick and error-free commissioning. Potential equalization lines are still being permanently connected, which is relatively time-consuming and can be subject to errors. HARTING's remedy: the Han® GND. The single-pole connector in the robust IP 65 plastic housing is designed for stranded wires from 10 - 35 mm² and is optionally available in crimp or axial screw termination. The latter has the advantage that the lines can be connected without a special tool. A simple screwdriver is all it takes to achieve a quick and easy reliable connection. Extra connector mating security can be provided by the use of additional locking elements that prevent unintentional opening.

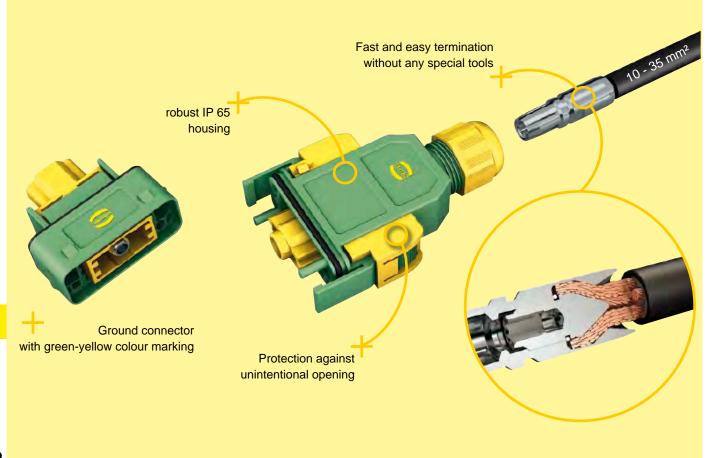



Features

- New: First connector for potential equalization
- · Slim, space saving design
- Low cost plastic hoods and housings
- · Colours: green and yellow
- Separate axial screw contacts can be terminated without any special tools directly to the wire.

Technical characteristics

Specifications DIN EN 60 664-1 DIN EN 61 984

Hoods/Housings

Material

hoods/housings
 seal
 cable seal
 Limiting temperatures
 Flammability acc. to UL 94
 polyamide
 -40 °C ... +85 °C
 V 0

Flammability acc. to UL 94
Degree of protection

according to DIN EN 60 529 for coupled connectors

for coupled connectors IP 65

Mechanical working life ≥ 500 mating cycles

Cable diameter 7.5 - 14 mm

Modules

Number of contacts 1

Material polycarbonate
Limiting temperatures -40 °C ... +125 °C

Flammability acc. to UL 94 V 0

Mechanical working life ≥ 500 mating cycles

Crimp Contacts

Material copper alloy

Surface
- hard-silver plated 3 µm Ag

Contact resistance Crimp terminal

- wire gauge 10 ... 35 mm²

Axial Screw Contacts

Material copper alloy Surface

- hard-silver plated 3 μm Ag Contact resistance ≤ 0.3 mΩ Screw terminal

- wire gauge¹⁾ 10 ... 35 mm²
- AWG 6 ... 2

- hexagonal driver SW 4

 $\leq 0.3 \text{ m}\Omega$

Han® GND




Number of contacts

1



Mateable Potential Equalization

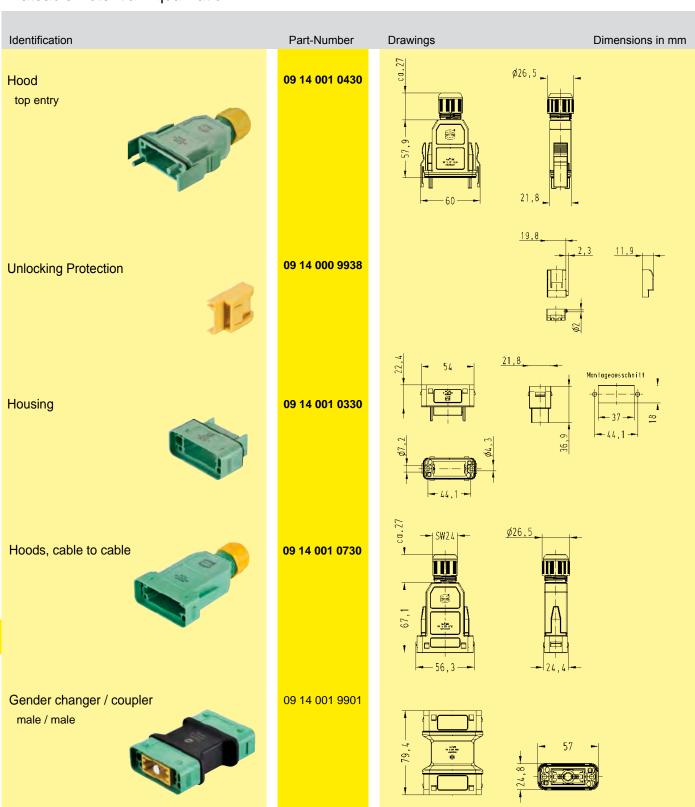

Han® GND




Number of contacts

1





Mateable Potential Equalization

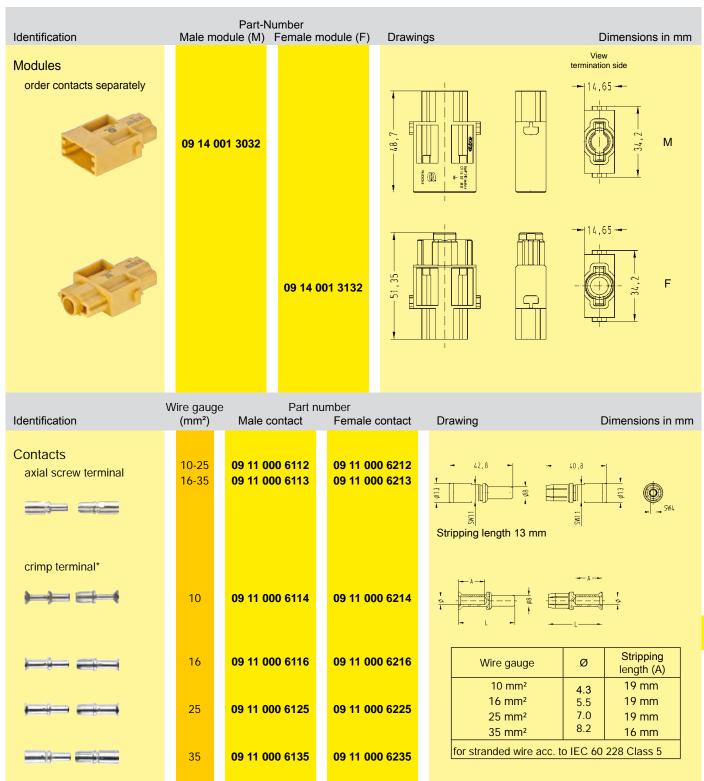

^{*} Crimp zone acc. to DIN EN 46 235



Assembly and construction


Assembly

Please use fine stranded wire (Class 5) which is recommend for the axial screw termination.




Do not twist the stripped wire!

Please strip the wire. All suitable wire gauges have to be stripped with a length of 13 mm (acc. to Class 5 wire).
 Insert stripped wire into the terminal and push fully inside. Pay attention that all fine stranded wires are inserted in the contact.

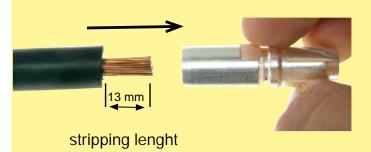



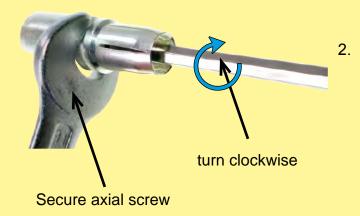

Please insert suitable torque key (SW 4) into the contact from mating side and turn the axial screw clockwise. For that purpose secure the axial screw with a spanner (SW 11).

Tighten the screw to the specified torque value.

Assembly and construction



3.

Insert the installed cable through the cable gland into the Han® GND housing!


Push the axial screw contact into the module until you hear an audible click, which is the indicator that the contact snaps into position.




Push the module back into the housing and turn the cable gland clockwise.



Mount the module in the housing with the enclosed screws.



Protection against unintentional opening



- 1.

 Push the unlocking protection over the opening latches to prevent an unintentional opening (the connector can only be unmated with a separate tool).
- 2. The removal of the unlocking protection can be done with a screwdriver for slotted screws (e.g. size 0.8 x 4.0). Insert the screwdriver in the unlocking protection slot and release the plastic latch until you are able to remove the unlocking protection with your fingers.



