

## Contents

Page

Description of the Han-Yellock® system . . . . .	<b>25.02</b>
Han-Yellock® 10 Hoods/Housings Technical characteristics . . . . .	<b>25.08</b>
Han-Yellock® 10 Hoods/Housings - Hoods . . . . .	<b>25.09</b>
Han-Yellock® 10 Hoods/Housings - Housings . . . . .	<b>25.10</b>
Summary Han® 3 A . . . . .	<b>25.11</b>
Han-Yellock® 30 + 60 Hoods/Housings Technical characteristics . . . . .	<b>25.16</b>
Han-Yellock® 30 + 60 Hoods/Housings - Hoods . . . . .	<b>25.17</b>
Han-Yellock® 30 + 60 Hoods/Housings - Housings . . . . .	<b>25.19</b>
Han-Yellock® Modules . . . . .	<b>25.22</b>
Han-Yellock® Quick Lock module . . . . .	<b>25.24</b>
Han-Yellock® Multiplier . . . . .	<b>25.26</b>
Han-Yellock® Adapter frames . . . . .	<b>25.28</b>
Summary Han-Modular® . . . . .	<b>25.30</b>
Han-Yellock® Monoblock 30 . . . . .	<b>25.32</b>
Han-Yellock® Monoblock 60 . . . . .	<b>25.34</b>
Han-Yellock® Accessories . . . . .	<b>25.36</b>

## Description of the Han-Yellock® system

### The Han-Yellock® - a special Han® connector

Han-Yellock® is a new product series which retains the core functionality but differs significantly from current size and shape formats. The approach of this series makes many new functions possible, for example:

- An internal, latched locking mechanism on the hood
- Multiplies the potentials in the connector with Han-Yellock® modules
- Usage of Han-Modular® modules with adapter frames
- Insulators can snap into the front or back walls of the housing
- Protected Earth contact (PE) in crimp or Quick Lock termination

These new technical features encourage sustained and effective improvements:

when purchasing products –

- Less article numbers and less inventory,

when planning for the electrical and mechanical layout –

- Less wiring work within a machine,

during the work flow –

- Less steps in the work flow and quicker assembly,

and during the after-sales stage –

- Reduced down times because of the latched locking mechanism and maintenance-friendly design



Assembly details

### Design overview

The Han-Yellock® interface consists of a housing, bulkhead mounting, on the housing side and a carrier hood with cover on the cable side.

Han-Yellock® offers the following features when assembling components:

- Han-Yellock® modules require only male crimp contacts.
- The PE is contacted on the housing; it can be connected with crimp and/or Quick Lock contacts.
- The Han-Yellock® hoods/housing are not plug-compatible with all other Han® hood/housing series.

The Han-Yellock® system can be used with a variety of insulators and contact inserts in order to establish an interface.


## The Locking

The locking ability is a key function of the Han-Yellock®. The function makes connections and disconnections safe, simple and quick – even under harsh industrial conditions.

Main advantages include:


- Easy handling
- Resistance to vibrations and shock
- Protected against accidental opening
- Compact, space-saving design

Han-Yellock® features a patented internal locking mechanism. The locking takes place as the cable and device sides are simply joined together. A red ring around the perimeter of the push button will be visible if the housing halves do not snap together properly. This ring disappears as soon as the internally protected stainless steel springs snap into place.

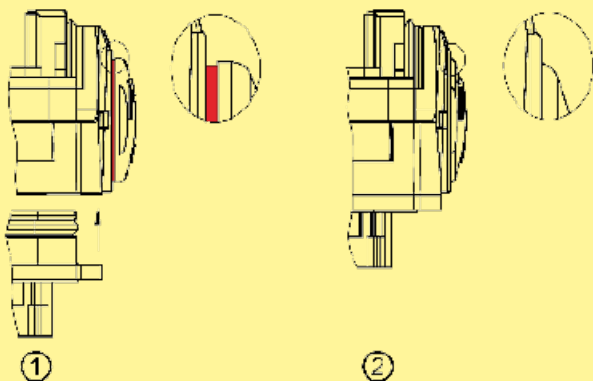

- ① unlocked  
② locked

This press-button locking also features an integrated blocking function. The locking mechanism can be locked by rotating the button 90°. It is then no longer possible to open the connector.

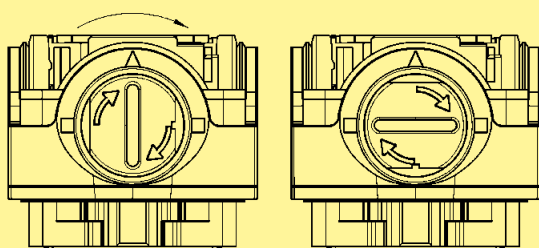

„open“


„blocked“

The press button can be set back to its visually open position only after the button is turned back 90°. It is then possible to release the two housing halves by pressing the snap-in button.

This feature provides an elegant mechanism for preventing an accidental opening of the connector – and no additional components are needed for it.

## Han-Yellock® modules

This new product series enables an improved approach and strategy for electrical planning and procurement. For assembling the Han-Yellock® connector only male crimp contacts are needed. The conduct between the two male contacts is made by multipliers.

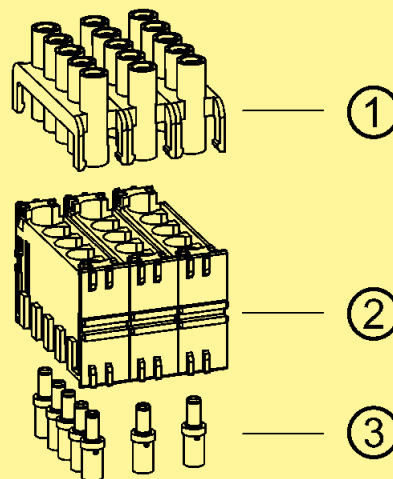

- ① multiplier  
② Han-Yellock® module  
③ Han-Yellock® crimp contacts


This concept allows a 1:1 wire to wire arrangement and in addition the use of bridges. Two to five contacts can be arranged.

It does not matter if the bridge attachment is inserted on the cable side or the housing side of the connector.

In the past, terminals blocks have been responsible for the function of multiplying potentials. But now this function has been integrated into the connector for a quick, compact and easy-to-service solution.


## Inserting the module into the hoods/housing

- The Han-Yellock® module should only be inserted into the „A“ plug-in position in the metal clamp.

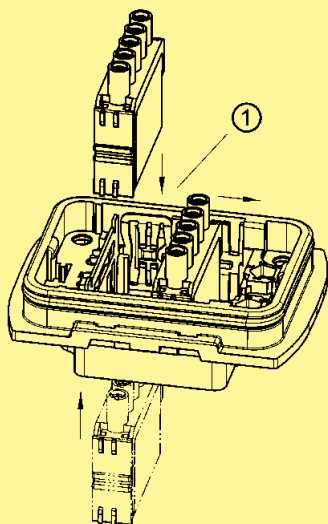


① plug-in position „A“

- The illustration shows the orientation of the module (see arrangement of contacts 1 ... 5).


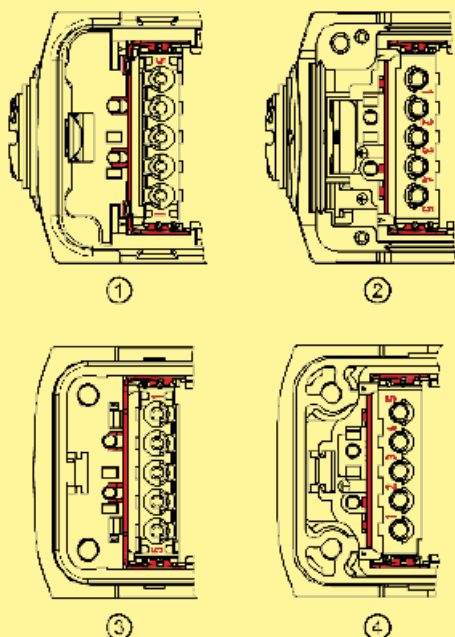


- ① Carrier hood, mating side
- ② Carrier hood, connection side
- ③ Housing, bulkhead mounting, mating side
- ④ Housing, bulkhead mounting, connection side
- A distinct click can be heard when the module snaps into position. It is then pushed along the rail to its final position. The plug-in slots must always be completely filled.



## Disassembling the Han-Yellock® module


- The removal tool (part no. 11 99 000 0001) is required to take out the module.
- The following illustration shows how to insert the removal tool into the metal clamp. The tool should then be pressed down until it reaches the end stop.
- The tool is then pulled back and the module comes out of the housing.
- The removal can be made from the connection side as well as from the mating side.

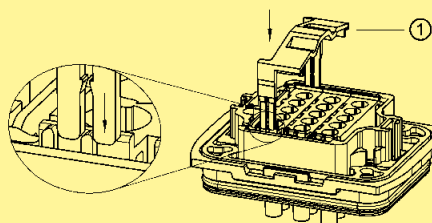

- ① removal tool
- ② housing, bulkhead mounting

The process is identical for both housings, bulkhead mounting, and carrier hoods.

The removal tool can be stored on the carrier hood:

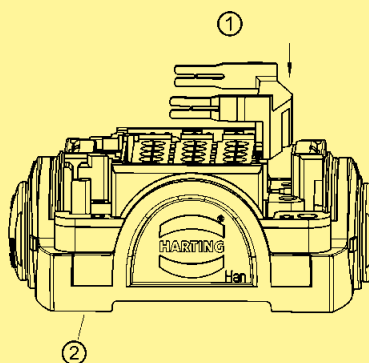


- ① removal tool
- ② carrier hood

### Han-Yellock® adapter frame

Han-Modular® series interfaces can be established using the Han-Yellock® adapter frame. The connection is based on a male/female contact arrangement.

Inserting the adapter frame in the housing:



- The adapter frame can be snapped into the housing, bulkhead mounting, on the termination side and the mating side (refer to the illustration).
- The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.
- The adapter frame then snaps in with a distinctly audible click.

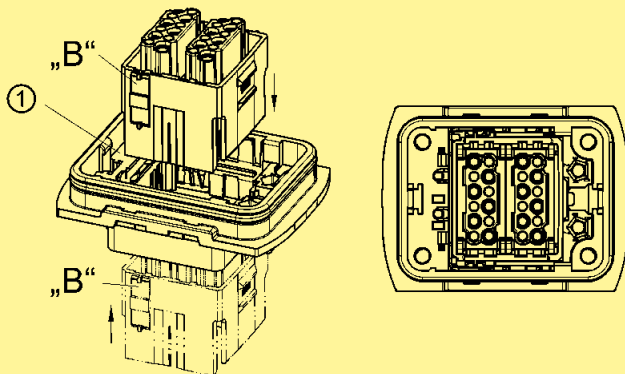

① metal clamp

Removal the adapter frame:

- The removal tool part no. 11 99 000 0001 is required for disassembly.
- The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.
- The removal tool should then be pulled outwards to remove the adapter frame from the housing.
- The removal can be made from the termination side as well as from the mating side.
- The process is identical for both housings, bulk-head mounting, and carrier hoods.

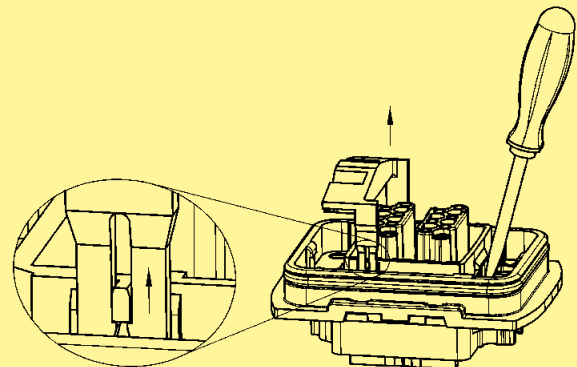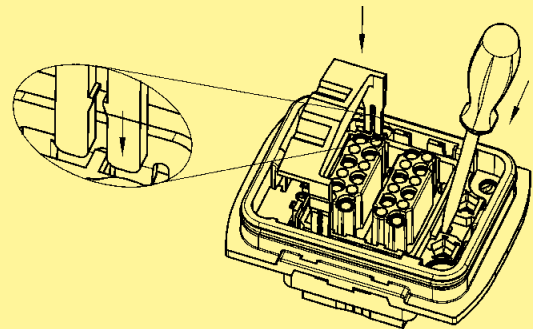

## Han-Yellock® Protection covers


### Protection cover function

To protect the insert against dust and water it is possible to use a Han-Yellock® protection cover.

The protection cover comes with a metal bearing pedestal and can be installed during initial or retrofit installation.

The Han-Yellock® design offer the possibility to snap in the pedestal either on the left or on the right side of the housing.

The direction of the cover movement can flip without turning the housing and inserts.

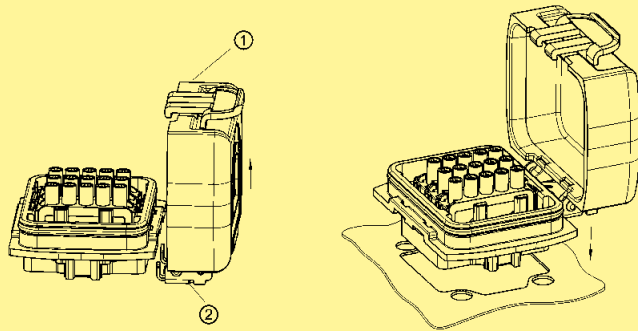


- ① cover
- ② bearing pedestal

## Han-Yellock® Ground terminal

### Ground terminal assembly

On the housing side ground terminals can be used.

After placing the frame deeply inside the housing slots the housing will be fixed to the panel leading to solid mounting of the complete set.

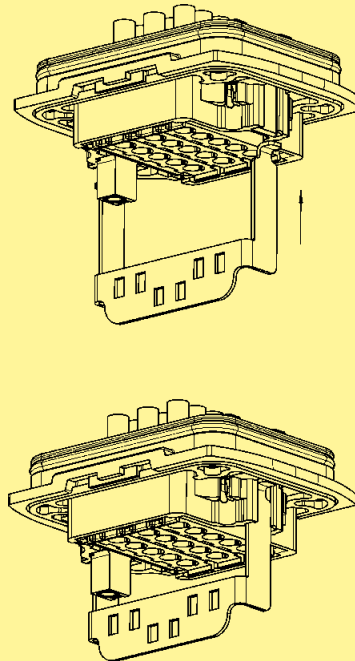




## Han-Yellock® Hoods/Housings



see page 25.08  
onwards

## Han-Yellock® Modules

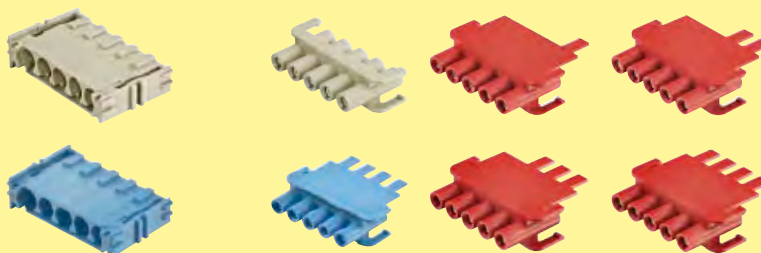


see page 25.22  
onwards

## Han-Yellock® Adapter frames



see page 25.28  
onwards

## Han-Yellock® Monoblocks

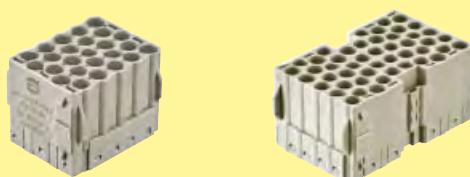

see page 25.32  
onwards

## Features







- Compatible with all inserts size Han® 3 A
- High robustness via an internal locking mechanism
- Optimal EMC properties
- High quality industrial design
- With entry for M20 or M25 cable glands

## Technical characteristics


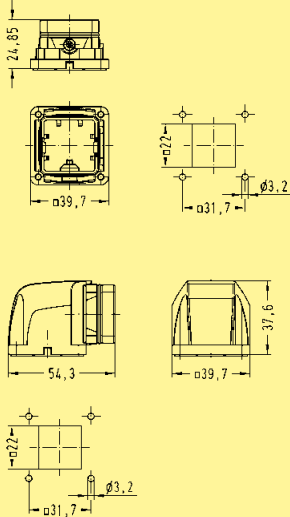

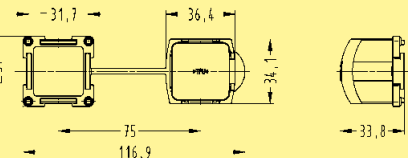

Material	zinc die-cast
Surface	
Hood	Epoxy powder paint
Housings bulkhead mounting	zinc passivation
Locking element	PA / stainless steel
Limiting temperatures	-40 °C ... +125 °C
Un-/Locking temperatures	-10 °C ... +85 °C
Degree of protection acc. to DIN EN 60 529	
for coupled connector	IP 65 / IP 67
Tightening torque	
M3 fixing screw	1 Nm











## Hoods Han-Yellock®





Identification	Part number	Cable entry	Drawing	Dimensions in mm
Hood top entry Han-Yellock® 10	 11 20 003 1400 11 20 003 1401	M20 M25		
Hood angled entry Han-Yellock® 10	 11 20 003 1600 11 20 003 1601	M20 M25		
Protection cover for hoods	 11 20 003 5456			

Housings Han-Yellock®





Identification	Part number	Cable entry	Drawing	Dimensions in mm
<p>Housings bulkhead mounting</p> <p>Han-Yellock® 10</p> 	11 20 003 0300			
<p>Han-Yellock® 10</p> 	11 20 003 0800			
<p>Protection cover for housings bulkhead mounting</p> 	11 20 003 5406			



Series	Han® 3 A	Han® 3 A Quick Lock	Han® 3 A Quick Lock	Han® 4 A
Number of contacts	3 + $\oplus$	3 + $\oplus$	3 + $\oplus$	4 + $\oplus$
Termination	Screw terminal 	Quick Lock termination 	Quick Lock termination 	Screw terminal 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	230 / 400 V	230 / 400 V
Wire gauge	1 ... 2.5 mm²	0.5 ... 2.5 mm²	0.25 ... 1.5 mm²	1 ... 2.5 mm²
Male insert (M)	09 20 003 2611	09 20 003 2633	09 20 003 2634	09 20 004 2611
Female insert (F)	09 20 003 2711	09 20 003 2733	09 20 003 2734	09 20 004 2711


Series	Han® 4 A Quick Lock	Han® 4 A Quick Lock	Han® 8 D	Han® 8 D Quick Lock
Number of contacts	4 + $\oplus$	4 + $\oplus$	8	8
Termination	Quick Lock termination 	Quick Lock termination 	Crimp terminal 	Quick Lock termination 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	230 / 400 V	230 / 400 V	~ 50 V / – 120 V	~ 50 V / – 120 V
Wire gauge	0.5 ... 2.5 mm²	0.25 ... 1.5 mm²	0.14 ... 2.5 mm²	0.25 ... 1.5 mm²
Male insert (M)	09 20 004 2633	09 20 004 2634	09 36 008 3001	09 36 008 2632
Female insert (F)	09 20 004 2733	09 20 004 2734	09 36 008 3101	09 36 008 2732

Series	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0	Han® Q 2/0
Number of contacts	2 + $\oplus$	2 + $\oplus$	2 + $\oplus$	2 + $\oplus$
Termination	Axial screw terminal 	Axial screw terminal 	Crimp terminal 	Axial screw terminal 
Rated current	40 A	40 A	40 A	40 A
Rated voltage	400 V	400 V	400 V	830 V
Wire gauge	2.5 ... 6 mm²	4 ... 10 mm²	1.5 ... 10 mm²	2.5 ... 6 mm²
Male insert (M)	09 12 002 2653	09 12 002 2651	09 12 002 3051	09 12 002 2654
Female insert (F)	09 12 002 2753	09 12 002 2751	09 12 002 3151	09 12 002 2754

Han-  
Yellowlock

Series	Han® Q 2/0	Han® Q 2/0	Han® Q 5/0	Han® Q 5/0 Quick Lock
Number of contacts	2 + ⊕	2 + ⊕	5 + ⊕	5 + ⊕
Termination	Axial screw terminal 	Crimp terminal 	Crimp terminal 	Quick Lock termination 
Rated current	40 A	40 A	16 A	16 A
Rated voltage	830 V	830 V	230 / 400 V	230 / 400 V
Wire gauge	4 ... 10 mm²	1,5 ... 10 mm²	0,14 ... 2,5 mm²	0,5 ... 2,5 mm²
Male insert (M)	09 12 002 2652	09 12 002 3052	09 12 005 3001	09 12 005 2633
Female insert (F)	09 12 002 2752	09 12 002 3152	09 12 005 3101	09 12 005 2733





Series	Han® Q 7/0	Han® Q 12/0		
Number of contacts	7 + ⊕	12 + ⊕		
Termination	Crimp terminal 	Crimp termination/ Quick Lock termination 		
Rated current	10 A	10 A		
Rated voltage	400 V	400 V		
Wire gauge	0,14 ... 2,5 mm²	0,14 ... 2,5 mm²		
Male insert (M)	09 12 007 3001	09 12 012 3001		
Female insert (F)	09 12 007 3101	09 12 012 3101		


Series	StaF® 6	StaF® 6		
Number of contacts	6	6		
Termination	Solder terminal 	Screw terminal 		
Rated current	10 A	10 A		
Rated voltage	~ 25 V / – 60 V	~ 25 V / – 60 V		
Wire gauge	2,5 mm²	1,5 mm²		
Male insert (F)	09 70 006 2615	09 70 006 2616		
Female Insert (M)	09 70 006 2812	09 70 006 2813		

Series	Han-Brid® Cu	Han-Brid® Cu	Han-Brid® Cu	Han-Brid® Cu
Number of contacts	4 / 2	4 / 2	4 / 2	4 / 2
Termination	Crimp terminal / IDC Insulation displacement terminal	Crimp terminal / Crimp terminal	Cage-clamp terminal / Cage-clamp terminal	Crimp terminal / Crimp terminal
Rated current	10 A	10 A	10 A	10 A
Rated voltage	50 V	50 V	50 V	50 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²
Male insert (M)	09 12 006 2611	09 12 006 3001	09 12 006 2695	09 12 006 2694
Female insert (F)	09 12 006 2701	09 12 006 3111	09 12 006 2795	09 12 006 2794

Series	Han-Brid® USB	Han-Brid® FireWire	Han-Brid® RJ45 C	
Number of contacts	2 / 4	2 / 6	2 / 4	
Termination	Crimp terminal / USB 2.0	Crimp terminal / IEEE 1394	Crimp terminal / RJ45	
Rated current	1 A	1 A	10 A	
Rated voltage	50 V	50 V	24 V	
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	
Male insert (M)	09 12 001 2794	09 12 001 2774	09 12 003 3011	
Female insert (F)	09 12 001 3091	09 12 001 3071		

Series	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C	Han-Brid® RJ45 C
Number of contacts	2 / 8	2 / 8	2 / 8	2 / 8
Termination	Crimp terminal / RJ45	Crimp terminal / RJ45	Crimp terminal / RJ45	Crimp terminal / RJ45
Rated current	10 A	10 A	10 A	10 A
Rated voltage	24 V	24 V	24 V	24 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²
Male insert (M)	09 12 003 3021	09 12 003 3031		
Female insert (F)			09 12 003 2774	09 12 003 2776

Series	Han-Brid® RJ45 C	Han-Brid® F.O.	Han-Brid® F.O.	Han-Brid® F.O.
Number of contacts	2 / 4	4 / 2	4 / 2	4 / 2
Termination	Crimp terminal / RJ45 	Crimp terminal / F.O. 	Crimp terminal / F.O. 	Crimp terminal / F.O. 
Rated current	10 A	10 A	10 A	10 A
Rated voltage	24 V	50 V	50 V	50 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²
Male insert (M)			09 12 004 2611	09 12 004 2601
Female insert (F)	09 12 003 2770	09 12 004 2711		

Series	Han® 4 A SC			
Number of contacts	4			
Termination	for F.O. 			
Rated current				
Rated voltage				
Wire gauge				
Male insert (M)	09 20 004 4701			
Female insert (F)	09 20 004 4711			






Han-Yellock

The KR 6 R900 sixx (KR AGILUS) with Han-Yellock® combines functional design and high technical requirements.

Source: KUKA Roboter GmbH

## Features

- Two-part hoods for easy wiring and testing
- High robustness via an internal locking mechanism
- Earthed contacts PE in crimped or Quick Lock termination technique
- Protection cover retrofit on housing side

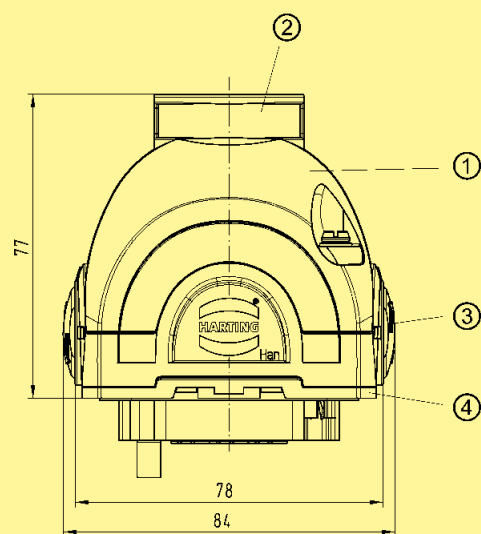

- ① Shell with top entry
- ② Thread M20 ... M40
- ③ Carrier hood with push button release
- ④ Housings bulkhead mounting



## Technical characteristics

### Shells and Housings, surface mounting

Material	aluminium die-cast
Surface	Epoxy powder paint
Locking element	stainless steel
Limiting temperatures	-40 °C ... +125 °C
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP 65 / IP 67
Tightening torque	
M4 fixing screw	1.2 Nm ... 2,0 Nm

### Carrier hoods and Housings, bulkhead mounting

Number of Han-Yellock® modules	
Han-Yellock® 30	3
Han-Yellock® 60	6
Material	zinc die-cast
Surface	zinc passivation
Locking element	PA / stainless steel
Hoods/Housings seal	NBR
Limiting temperatures	-40 °C ... +125 °C
Un-/Locking temperatures	-10 °C ... +85 °C
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP 65 / IP 67
Mechanical working life	
- mating cycles	< 500
PE contact	
wire gauge	≤ 4 mm²
Tightening torque	
M4 fixing screw	1 Nm
panel fastener	2.3 Nm



- ① M4 fixing screw (screw length > 20 mm)
- ② panel fastener

### Protection covers

Material	PA
Hoods/Housings seal	NBR
Degree of protection acc. to DIN EN 60 529 for coupled connector	IP 65 / IP 67
Flammability acc. to UL 94	V 0


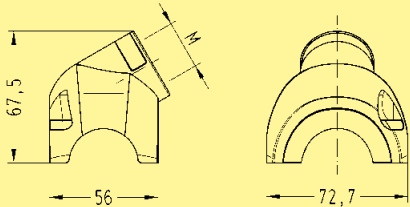











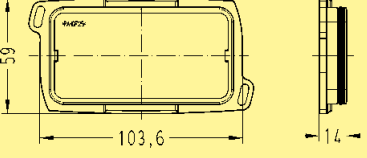


## Hoods Han-Yellock®

Identification	Part number	Cable entry	Drawing	Dimensions in mm
<b>Shell</b> side-entry Han-Yellock® 30	<b>11 12 300 1500</b> <b>11 12 300 1501</b> <b>11 12 300 1502</b>	M20 M25 M32		
Han-Yellock® 30	11 12 300 1510	M20		
Han-Yellock® 60	<b>11 12 600 1501</b> <b>11 12 600 1502</b> <b>11 12 600 1503</b>	M25 M32 M40		
<b>Shell</b> top entry Han-Yellock® 30	<b>11 12 300 1400</b> <b>11 12 300 1401</b> <b>11 12 300 1402</b>	M20 M25 M32		
Han-Yellock® 60	<b>11 12 600 1401</b> <b>11 12 600 1402</b> <b>11 12 600 1403</b>	M25 M32 M40		
Han-Yellock® 60	<b>11 12 600 1411</b>  <b>11 12 600 1415</b>	2x M25  1x M20 1x M25		

Han-Yellock

## Hoods Han-Yellok®

Identification	Part number	Cable entry	Drawing	Dimensions in mm
<b>Shell</b> angled entry Han-Yellok® 30 	<b>11 12 300 1600</b> <b>11 12 300 1601</b> <b>11 12 300 1602</b>	M20 M25 M32		
<b>Carrier hood</b> plain push button Han-Yellok® 30 	<b>11 12 300 0100</b>			
Han-Yellok® 60 	<b>11 12 600 0100</b>			
<b>Carrier hood</b> push button, slot Han-Yellok® 30 	<b>11 12 300 0110</b>			
Han-Yellok® 60 	<b>11 12 600 0110</b>			
<b>Protection cover</b> for carrier hoods Han-Yellok® 30 	<b>11 12 300 5451</b>			
Han-Yellok® 60 	<b>11 12 600 5451</b>			

Stock items in bold type




## Housings Han-Yellock®


Identification	Part number	Cable entry	Drawing	Dimensions in mm
----------------	-------------	-------------	---------	------------------

### Housings surface mounting


Han-Yellock® 30




11 12 300 1200	M20
11 12 300 1201	M25
11 12 300 1202	M32
11 12 300 1204	2x M20
11 12 300 1205	2x M25
11 12 300 1206	2x M32

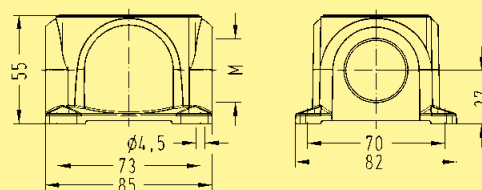

Han-Yellock® 60



11 12 600 1201	M25
11 12 600 1202	M32
11 12 600 1203	M40
11 12 600 1205	2x M25
11 12 600 1206	2x M32
11 12 600 1207	2x M40

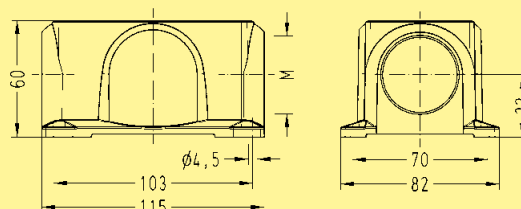


### Housings surface mounting incl. Housings bulkhead mounting

Han-Yellock® 30




11 12 300 1210	M20
11 12 300 1211	M25
11 12 300 1212	M32
11 12 300 1214	2x M20
11 12 300 1215	2x M25
11 12 300 1216	2x M32

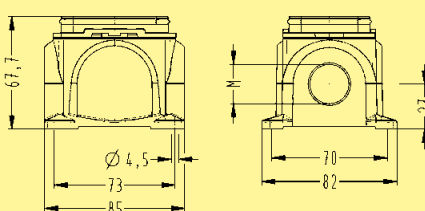





Han-Yellock® 60



11 12 600 1211	M25
11 12 600 1212	M32
11 12 600 1213	M40
11 12 600 1215	2x M25
11 12 600 1216	2x M32
11 12 600 1217	2x M40

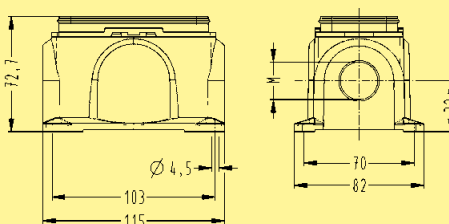


## Housings Han-Yellock®

Identification	Part number	Cable entry	Drawing	Dimensions in mm
<p>Protection cover for housings, bulkhead mounting</p> <p>Han-Yellock® 30</p> 	11 12 300 5401			
<p>Han-Yellock® 60</p> 	11 12 600 5401			


## Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly
- Wiring with male contacts only

Placement for Han-Yellock® 30  
with 3 Han-Yellock® modules




Placement for Han-Yellock® 60  
with 6 Han-Yellock® modules

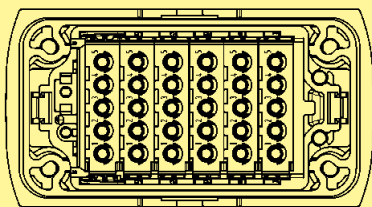

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

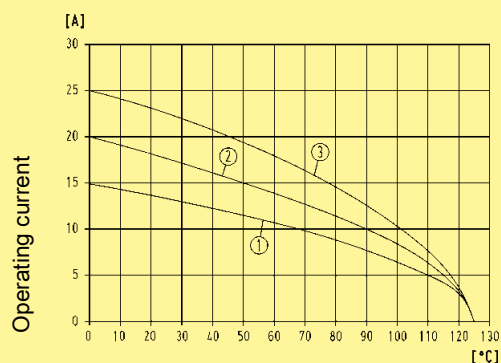

Ambient temperature

① wire gauge: 1.5 mm²

② wire gauge: 2.5 mm²

③ wire gauge: 4 mm²

for connector with 3 Han-Yellock® modules, fully loaded  
(multiplier 1:1)

## Technical characteristics

Specifications DIN EN 60 664-1  
DIN EN 61 984

### Modules

Electrical data	
acc. to EN 61 984	<b>20 A 500 V 6 kV 3</b>
Rated current	20 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Pollution degree 2 also	20 A 690 V 8 kV 2
Insulation resistance	$\geq 10^{10} \Omega$
Material	PC
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life	
- mating cycles	$\geq 500$

### Contacts


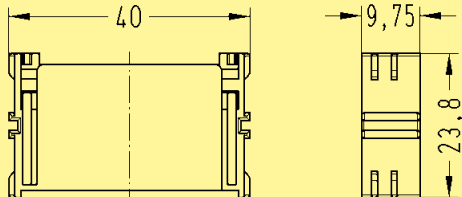

Material	copper alloy
Surface	
- hard-silver plated	3 µm Ag
- hard-gold plated	2 µm Au over 3 µm Ni
Contact resistance	$\leq 2 \text{ m}\Omega$
Crimp terminal	
- Wire gauge	0.14 ... 4 mm²
- AWG	26 ... 12
Stripping length	6.5 mm


### Tools


see chapter 99

Number of contacts

5

Identification		Part number	Drawing	Dimensions in mm
Han-Yellock® module				
		11 05 105 3001		
		11 05 105 3011		

Identification		Wire gauge (mm²)	Part number	Drawing	Dimensions in mm																										
Han-Yellock® crimp contacts																															
Male contact Han-Yellock® TC20																															
silver plated	0.14-0.37	11 05 000 6101	<table><tr><th colspan="2">Wire gauge</th><th>Stripping length</th></tr><tr><td>0.14-0.37 mm²</td><td>AWG 26-22</td><td>6.5 mm</td></tr><tr><td>0.5 mm²</td><td>AWG 20</td><td>6.5 mm</td></tr><tr><td>0.75 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1 mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1.5 mm²</td><td>AWG 16</td><td>6.5 mm</td></tr><tr><td>2.5 mm²</td><td>AWG 14</td><td>6.5 mm</td></tr><tr><td>3 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr><tr><td>4 mm²</td><td>AWG 12</td><td>6.5 mm</td></tr></table>	Wire gauge		Stripping length	0.14-0.37 mm²	AWG 26-22	6.5 mm	0.5 mm²	AWG 20	6.5 mm	0.75 mm²	AWG 18	6.5 mm	1 mm²	AWG 18	6.5 mm	1.5 mm²	AWG 16	6.5 mm	2.5 mm²	AWG 14	6.5 mm	3 mm²	AWG 12	6.5 mm	4 mm²	AWG 12	6.5 mm	
	Wire gauge			Stripping length																											
	0.14-0.37 mm²	AWG 26-22		6.5 mm																											
	0.5 mm²	AWG 20		6.5 mm																											
	0.75 mm²	AWG 18		6.5 mm																											
	1 mm²	AWG 18		6.5 mm																											
	1.5 mm²	AWG 16		6.5 mm																											
	2.5 mm²	AWG 14		6.5 mm																											
3 mm²	AWG 12	6.5 mm																													
4 mm²	AWG 12	6.5 mm																													
0.5	11 05 000 6102																														
0.75	11 05 000 6103																														
1	11 05 000 6104																														
1.5	11 05 000 6105																														
2.5	11 05 000 6106																														
3	11 05 000 6107																														
4	11 05 000 6108																														
gold plated	0.14-0.37	11 05 000 6121																													
	0.5	11 05 000 6122																													
	0.75	11 05 000 6123																													
	1	11 05 000 6124																													
	1.5	11 05 000 6125																													
	2.5	11 05 000 6126																													
	3	11 05 000 6127																													
	4	11 05 000 6128																													

Removal tool for crimp contacts		09 99 000 0319	
---------------------------------	--	----------------	--

Han-Yellock


25  
23

Stock items in bold type


## Features

- Snap-in assembly from mating side and from termination side
- Bus bar within bridge attachments
- Finger safe design
- Fast and tool-less assembly
- Compatible with Han-Yellock® modules with crimp termination

Placement for Han-Yellock® 30  
with 3 Han-Yellock® modules




Placement for Han-Yellock® 60  
with 6 Han-Yellock® modules

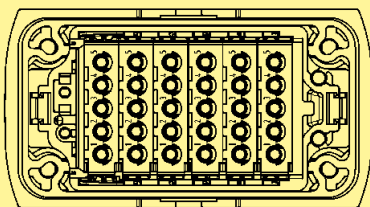

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

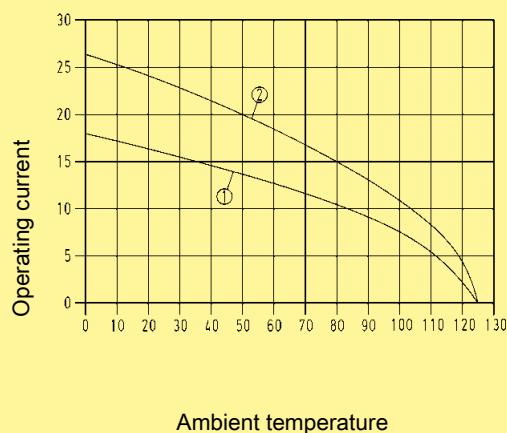

① wire gauge: 1.5 mm<sup>2</sup>

② wire gauge: 2.5 mm<sup>2</sup>

for connector with 3 Han-Yellock® modules, fully loaded  
(multiplier 1:1)

## Technical characteristics

Specifications	DIN EN 60 664-1 DIN EN 61 984
----------------	----------------------------------

### Quick Lock Modules

#### blue slide

Electrical data acc. to EN 61 984	<b>20 A 500 V 6 kV 3</b>
Rated current	20 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Pollution degree 2 also	20 A 690 V 8 kV 2

#### black slide

Electrical data acc. to EN 61 984	<b>10 A 500 V 6 kV 3</b>
Rated current	10 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Pollution degree 2 also	10 A 690 V 8 kV 2

Insulation resistance	≥ 10 <sup>10</sup> Ω
Material	polycarbonate
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life - mating cycles	≥500

### Contacts

Material	copper alloy
----------	--------------

Surface	- hard-silver plated
Contact resistance	3 μm Ag ≤ 2 mΩ

#### Quick Lock termination

##### blue slide

- Wire gauge	0.5 ... 2.5 mm <sup>2</sup>
- AWG	20 ... 14
- Stripping length	10 mm
- Max. insulation diameter	3.6 mm

##### black slide

- Wire gauge	0.25 ... 1.5 mm <sup>2</sup>
- AWG	23 ... 16
- Stripping length	10 mm
- Max. insulation diameter	3 mm

### PE contact

Material	copper alloy
----------	--------------

Surface	- hard-silver plated
Contact resistance	3 μm Ag ≤ 2 mΩ

#### Crimp terminal

- Wire gauge	6 mm <sup>2</sup> / 10 mm <sup>2</sup>
- AWG	10 / 8
Stripping length	7.5 mm

Suitable crimping tool	09 99 000 0377
------------------------	----------------




Number of contacts

5

Identification	Part number	Drawing	Dimensions in mm
----------------	-------------	---------	------------------

Han-Yellock® Quick Lock module



blue slide  
0.5 ... 2.5 mm²




black slide  
0.25 ... 1.5 mm²



**11 05 105 2633**

**11 05 105 2634**

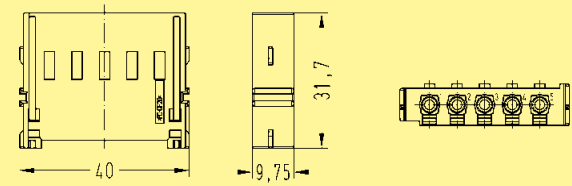

Han-Yellock






Features

- Visible bridge position from mating side and from termination side
- Multiplier can be placed on the housing side or on the cable side
- Bus bar functionality for 1 up to 5 contacts
- Fast and easy exchange

Technical characteristics

Specifications                      DIN EN 60 664-1  
   DIN EN 61 984

Multiplier  
Number of contacts                      5  
Material                                      polycarbonate  
Flammability acc. to UL 94              V 0  
Mechanical working life  
- mating cycles                              ≥500

	Bus bar contacts	Single contacts	Circuit diagram
Multiplier 1:1	0	5	
Multiplier 2:3	2	3	
Multiplier 3:2	3	2	
Multiplier 4:1	4	1	
Multiplier 5:0	5	0	

Number of contacts

# 5



Identification		Part number	Drawing	Dimensions in mm
Han-Yellock® Multiplier				
Multiplier 1:1		<b>11 05 105 2801</b>		
Multiplier 2:3		<b>11 05 105 2802</b>		
Multiplier 3:2		<b>11 05 105 2803</b>		
Multiplier 4:1		<b>11 05 105 2804</b>		
Multiplier 5:0		<b>11 05 105 2805</b>		
Multiplier 5:0		<b>11 05 105 2815</b>		

Han-Yellock

Features

- Flexible design of interfaces with the aid of Han-Modular®
- Snap-in assembly from mating side and from termination side for Han-Yellock® 30 and 60
- Removal from mating side and from termination side possible for Han-Yellock® 30 and 60
- Fast and tool-less assembly
- Mounting of adapter frame Han-Yellock® 20 from termination side only

Technical characteristics


Specifications                      DIN EN 60 664-1  
   DIN EN 61 984

Adapter frames  
Number of modules                      1 / 2 / 4  
Material                                      PC  
Flammability acc. to UL 94              V 0

		Han-Yellock® Hood/Housing				
Quantity		Han-Yellock® 30	Han-Yellock® 30	Han-Yellock® 60	Han-Yellock® 60	Han-Yellock® 60
Combinations	Han-Yellock® 20 Adapter frame	1		2	1	
	Han-Yellock® 30 Adapter frame		1			
	Han-Yellock® 60 Adapter frame					1
	Han-Yellock® Module	1		2	4	

Assembly


- The adapter frame can be snapped into the housing, bulk-head mounting, on the termination side and the mating side (refer to the illustration).
- The lateral plastic tabs („B“) are pressed into the metal clamps on the housing.
- The adapter frame then snaps in with a distinctly audible click.

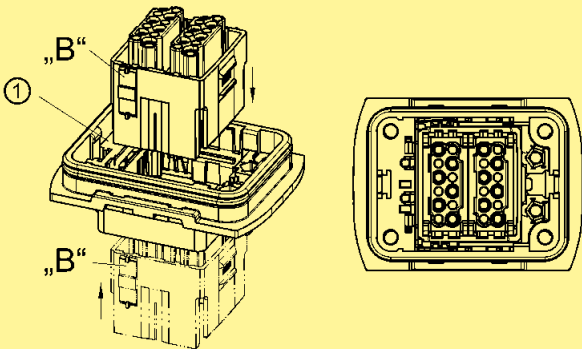

① metal clamp

Removal

- The removal tool part no. 11 99 000 0001 is required for disassembly.
- The removal tool is inserted into the metal clamp and pressed down as shown in the following illustration. A screwdriver need also be placed into the notch in the housing.
- The removal tool should then be pulled outwards to remove the adapter frame from the housing.
- The removal can be made from the termination side as well as from the mating side.
- The process is identical for both housings, bulkhead mounting, and carrier hoods.

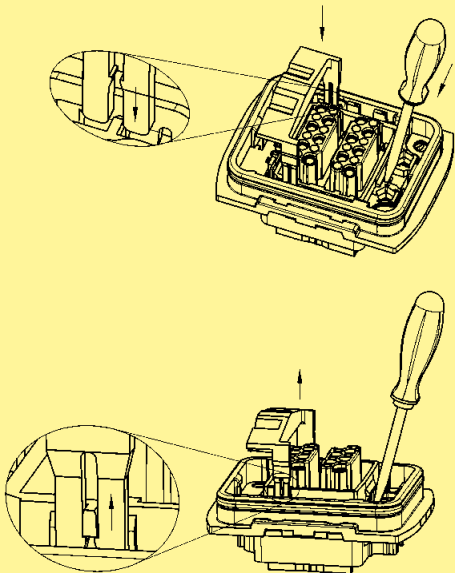















Identification	Part number	Drawing	Dimensions in mm
<b>Han-Yellock® 20 Adapter frames<sup>1)2)</sup></b>			
for carrier hoods	<b>11 00 200 0101</b>		
for housings, bulkhead mounting	<b>11 00 200 0301</b>		
<b>Han-Yellock® 30 Adapter frames<sup>2)</sup></b>			
for carrier hoods	<b>11 00 300 0101</b>		
for housings, bulkhead mounting	<b>11 00 300 0301</b>		
<b>Han-Yellock® 60 Adapter frames<sup>2)</sup></b>			
for carrier hoods	<b>11 00 600 0101</b>		
for housings, bulkhead mounting	<b>11 00 600 0301</b>		

Han-Yellock



<sup>1)</sup> mounting from termination side only  
<sup>2)</sup> Removal tool for modules see page 99.07




Series	Han® CC Protected module	Han® CD module	Han E® module	Han® E Quick Lock module
Number of contacts	4	3	6	6
Modules	Crimp terminal 	Crimp terminal 	Crimp terminal 	Quick Lock termination 
Rated current	40 A	40 A	16 A	16 A
Rated voltage	830 V	830 V	500 V	500 V
Wire gauge	1.5 ... 6 mm²	1.5 ... 6 mm²	0.14 ... 4 mm²	0.5 ... 2.5 mm²









Series	Han® EE module	Han® EE Quick Lock module	Han E® Protected module	Han® EEE module
Number of contacts	8	8	6	20
Modules	Crimp terminal 	Quick Lock termination 	Crimp terminal 	Crimp terminal 
Rated current	16 A	16 A	16 A	16 A
Rated voltage	400 V	400 V	830 V	500 V
Wire gauge	0.14 ... 4 mm²	0.5 ... 2.5 mm²	0.14 ... 4 mm²	0.14 ... 4 mm²

Series	Han® ES module	Han DD® module	Han DD® Quick Lock module	Han® DDD module
Number of contacts	5	12	12	17
Modules	Cage-clamp terminal 	Crimp terminal 	Quick Lock termination 	Crimp terminal 
Rated current	16 A	10 A	10 A	10 A
Rated voltage	400 V	250 V	250 V	160 V
Wire gauge	0.14 ... 2.5 mm²	0.14 ... 2.5 mm²	0.25 ... 1.5 mm²	0.14 ... 2.5 mm²

Han-Yellock

Series	Han® High Density module	Han® D-Sub module		
Number of contacts	25	9		
Modules	Crimp terminal 	Crimp terminal 		
Rated current	4 A	5 A		
Rated voltage	50 V	50 V		
Wire gauge	0.08 ... 0.52 mm²	0.08 ... 0.52 mm²		

Series	Han® USB module	Han® RJ45 module	Han® GigaBit module	
Number of contacts	4	8	8	
Modules	USB 2.0	Ethernet Cat. 6	Ethernet Cat. 6	
				

Series	Han-Quintax® module				Han® Multi module	
Number of contacts	2					
Modules						
Contacts	Han-Quintax® contact 4 + shielding	High Density Quintax contact 8 + shielding	Han D® Coax contact 75 Ω 1 + shielding	Han E® Coax contact 50 Ω 1 + shielding	F.O. contact	Coaxial contact
						
			75 Ω	50 Ω	Multimode F.O. HCS®*/PCF F.O. 1 mm POF	50 Ω RG 174 75 Ω RG 179 50 Ω RG 58


## Features

- Snap-in assembly from mating side and from termination side
- Wiring with male and female contacts
- Finger safe design
- Fast and tool-less assembly

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

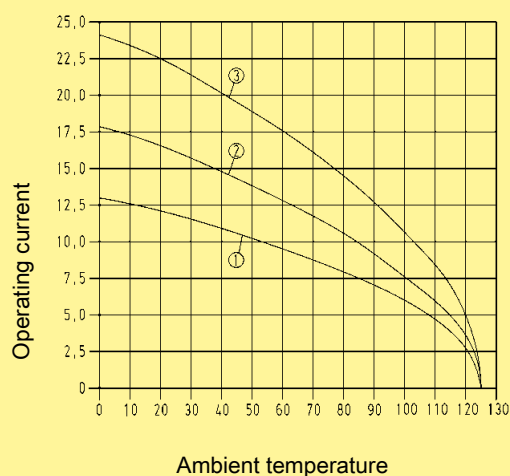

① wire gauge: 1.5 mm²

② wire gauge: 2.5 mm²

③ wire gauge: 4 mm²

## Technical characteristics

Specifications	DIN EN 60 664-1 DIN EN 61 984
----------------	----------------------------------

### Monoblocks

Electrical data	
acc. to EN 61 984	<b>16 A 500 V 6 kV 3</b>
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Pollution degree 2 also	16 A 690 V 8 kV 2
Insulation resistance	$\geq 10^{10} \Omega$
Material	polycarbonate
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life	
- mating cycles	$\geq 500$

### Contacts

Material	copper alloy
Surface	
- hard-silver plated	3 µm Ag
- hard-gold plated	2 µm Au over 3 µm Ni
Contact resistance	$\leq 2 \text{ m}\Omega$
Crimp terminal	
- Wire gauge	0.14 ... 4 mm²
- AWG	26 ... 12
Stripping length	6.5 mm

### Tools


see chapter 99







Number of contacts

25

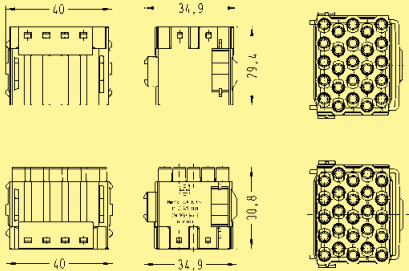

Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<div>Han- Yellock® Monoblock 30</div> <div>Order crimp contacts separately suitable for hoods/housings size 30</div> <div>ATTENTION! It is not possible to use 2 monoblocks 30 in the Han- Yellock® 60 series!</div>	11 05 325 3001	11 05 325 3101		

Identification	Wire gauge (mm²)	Part number		Drawing	Dimensions in mm																																			
		Male contact	Female contact																																					
<div>Han- Yellock® crimp contacts</div> <div>Han- Yellock® TC20</div> <div>silver plated</div> 	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6101 11 05 000 6102 11 05 000 6103 11 05 000 6104 11 05 000 6105 11 05 000 6106 11 05 000 6107 11 05 000 6108	11 05 000 6201 11 05 000 6202 11 05 000 6203 11 05 000 6204 11 05 000 6205 11 05 000 6206 11 05 000 6207 11 05 000 6208	 <table><thead><tr><th colspan="3">Wire gauge</th><th>Stripping length</th></tr></thead><tbody><tr><td>0.14-0.37</td><td>mm²</td><td>AWG 26-22</td><td>6.5 mm</td></tr><tr><td>0.5</td><td>mm²</td><td>AWG 20</td><td>6.5 mm</td></tr><tr><td>0.75</td><td>mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1</td><td>mm²</td><td>AWG 18</td><td>6.5 mm</td></tr><tr><td>1.5</td><td>mm²</td><td>AWG 16</td><td>6.5 mm</td></tr><tr><td>2.5</td><td>mm²</td><td>AWG 14</td><td>6.5 mm</td></tr><tr><td>3</td><td>mm²</td><td>AWG 12</td><td>6.5 mm</td></tr><tr><td>4</td><td>mm²</td><td>AWG 12</td><td>6.5 mm</td></tr></tbody></table>	Wire gauge			Stripping length	0.14-0.37	mm²	AWG 26-22	6.5 mm	0.5	mm²	AWG 20	6.5 mm	0.75	mm²	AWG 18	6.5 mm	1	mm²	AWG 18	6.5 mm	1.5	mm²	AWG 16	6.5 mm	2.5	mm²	AWG 14	6.5 mm	3	mm²	AWG 12	6.5 mm	4	mm²	AWG 12	6.5 mm
Wire gauge			Stripping length																																					
0.14-0.37	mm²	AWG 26-22	6.5 mm																																					
0.5	mm²	AWG 20	6.5 mm																																					
0.75	mm²	AWG 18	6.5 mm																																					
1	mm²	AWG 18	6.5 mm																																					
1.5	mm²	AWG 16	6.5 mm																																					
2.5	mm²	AWG 14	6.5 mm																																					
3	mm²	AWG 12	6.5 mm																																					
4	mm²	AWG 12	6.5 mm																																					
<div>gold plated</div> 	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	11 05 000 6121 11 05 000 6122 11 05 000 6123 11 05 000 6124 11 05 000 6125 11 05 000 6126 11 05 000 6127 11 05 000 6128	11 05 000 6221 11 05 000 6222 11 05 000 6223 11 05 000 6224 11 05 000 6225 11 05 000 6226 11 05 000 6227 11 05 000 6228																																					

Removal tool for crimp contacts	09 99 000 0319	09 99 000 0319	
---------------------------------	----------------	----------------	--


## Features

- Snap-in assembly from mating side and from termination side
- Wiring with male and female contacts
- Finger safe design
- Fast and tool-less assembly

## Current carrying capacity

The current carrying capacity of the connectors is limited by the thermal load capability of the contact element material including the connections and the insulating parts. The derating curve is therefore valid for currents which flow constantly (non-intermittent) through each contact element of the connector evenly, without exceeding the allowed maximum temperature.

Measuring and testing techniques according to DIN EN 60 512-5-2

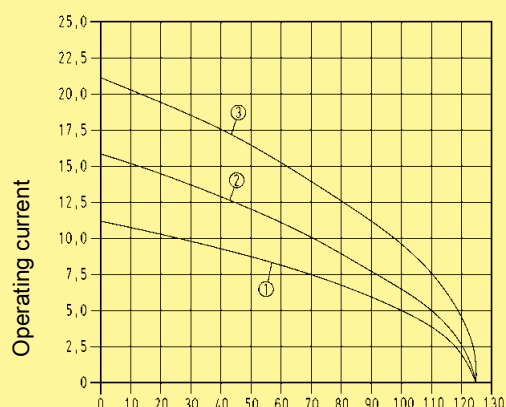

Ambient temperature

① wire gauge: 1.5 mm²

② wire gauge: 2.5 mm²

③ wire gauge: 4 mm²

## Technical characteristics

### Specifications

DIN EN 60 664-1  
DIN EN 61 984

### Monoblocks

Electrical data	
acc. to EN 61 984	<b>16 A 500 V 6 kV 3</b>
Rated current	16 A
Rated voltage	500 V
Rated impulse voltage	6 kV
Pollution degree	3
Pollution degree 2 also	16 A 690 V 8 kV 2
Insulation resistance	$\geq 10^{10} \Omega$
Material	polycarbonate
Limiting temperatures	-40 °C ... +125 °C
Flammability acc. to UL 94	V 0
Mechanical working life	
- mating cycles	$\geq 500$

### Contacts


Material	copper alloy
Surface	
- hard-silver plated	3 µm Ag
- hard-gold plated	2 µm Au over 3 µm Ni
Contact resistance	$\leq 2 \text{ m}\Omega$
Crimp terminal	
- Wire gauge	0.14 ... 4 mm²
- AWG	26 ... 12
Stripping length	6.5 mm

### Tools

see chapter 99

Number of contacts

48

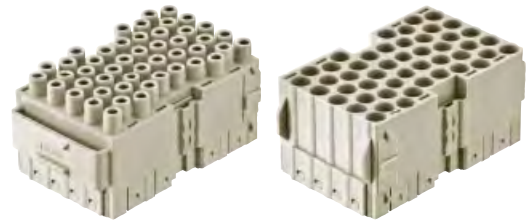
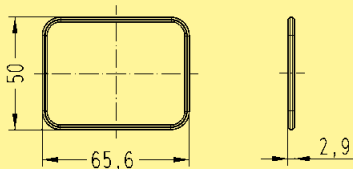

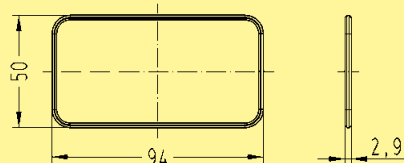

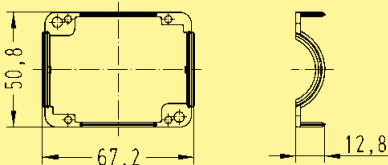

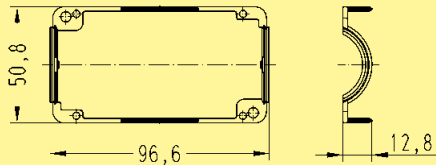



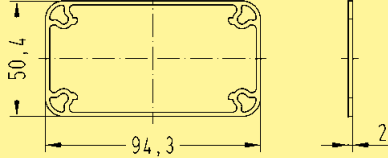


Identification	Part number		Drawing	Dimensions in mm
	Male insert (M)	Female insert (F)		
<b>Han-Yellock® Monoblock 60</b>  Order crimp contacts separately suitable for hoods/housings size 60	<b>11 05 648 3001</b>	<b>11 05 648 3101</b>		
Identification	Wire gauge (mm²)	Part number	Drawing	Dimensions in mm
		Male contact		
<b>Han-Yellock® crimp contacts</b> <b>Han-Yellock® TC20</b>  silver plated	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	<b>11 05 000 6101</b> <b>11 05 000 6102</b> <b>11 05 000 6103</b> <b>11 05 000 6104</b> <b>11 05 000 6105</b> <b>11 05 000 6106</b> <b>11 05 000 6107</b> <b>11 05 000 6108</b>	<b>11 05 000 6201</b> <b>11 05 000 6202</b> <b>11 05 000 6203</b> <b>11 05 000 6204</b> <b>11 05 000 6205</b> <b>11 05 000 6206</b> <b>11 05 000 6207</b> <b>11 05 000 6208</b>	
gold plated	0.14-0.37 0.5 0.75 1 1.5 2.5 3 4	<b>11 05 000 6121</b> <b>11 05 000 6122</b> <b>11 05 000 6123</b> <b>11 05 000 6124</b> <b>11 05 000 6125</b> <b>11 05 000 6126</b> <b>11 05 000 6127</b> <b>11 05 000 6128</b>	<b>11 05 000 6221</b> <b>11 05 000 6222</b> <b>11 05 000 6223</b> <b>11 05 000 6224</b> <b>11 05 000 6225</b> <b>11 05 000 6226</b> <b>11 05 000 6227</b> <b>11 05 000 6228</b>	
Removal tool for crimp contacts		<b>09 99 000 0319</b>	<b>09 99 000 0319</b>	








Wire gauge			Stripping length
0.14-0.37	mm²	AWG 26-22	6.5 mm
0.5	mm²	AWG 20	6.5 mm
0.75	mm²	AWG 18	6.5 mm
1	mm²	AWG 18	6.5 mm
1.5	mm²	AWG 16	6.5 mm
2.5	mm²	AWG 14	6.5 mm
3	mm²	AWG 12	6.5 mm
4	mm²	AWG 12	6.5 mm




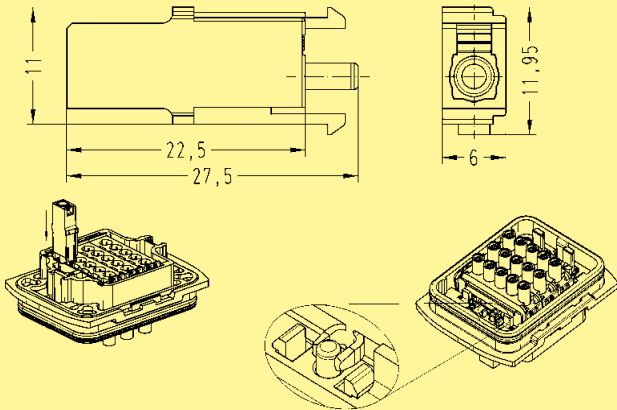



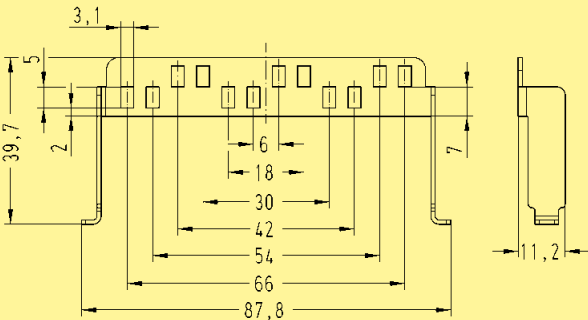
Han-Yellock

Stock items in bold type

Identification	Part number	Drawing	Dimensions in mm
<b>Han-Yellock® Profile seal</b>  for Han-Yellock® 30 	<b>11 00 300 9501</b>		
for Han-Yellock® 60 	<b>11 00 600 9501</b>		
<b>Han-Yellock® Seal for carrier hoods</b>  for Han-Yellock® 30 	<b>11 00 300 9502</b>		
for Han-Yellock® 60 	<b>11 00 600 9502</b>		
<b>Han-Yellock® Gasket</b>  for Han-Yellock® 30 	<b>11 00 300 9503</b>		
for Han-Yellock® 60 	<b>11 00 600 9503</b>		

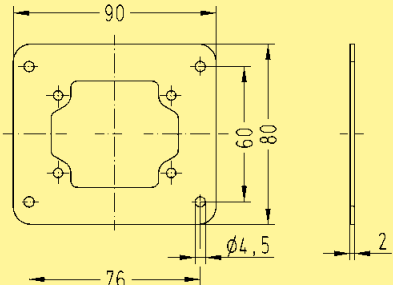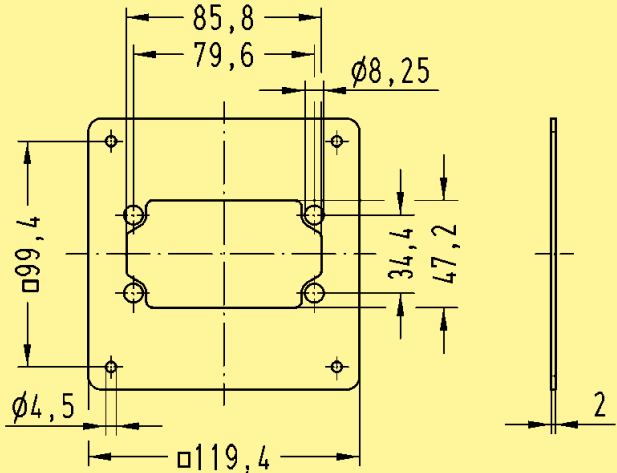Stock items in bold type

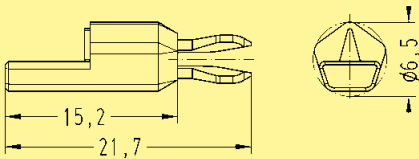Identification	Part number	Drawing	Dimensions in mm
<p>Han-Yellock® Adapter plate</p> <p>for Han-Yellock® 30</p>  <p>circular 68 mm punch for Han-Yellock® panel cut out</p> <p>for Han-Yellock® 60</p> 	<p><b>11 00 300 9601</b></p> <p><b>11 00 600 9601</b></p>	 	
<p>Han-Yellock® Identification stickers</p> 	<b>11 00 000 9601</b>		
<p>Han-Yellock® Coding pins</p> <p>Set of 8 coding pins</p> 	<b>11 00 000 9501</b>		

Identification	Cable gauge (mm²)	Part number	Drawing	Dimensions in mm
<p>Han-Yellock® PE contacts</p> <p>Male contact</p> 	<p>6</p> <p>10</p>	<p><b>11 00 000 9509</b></p> <p><b>11 00 000 9510</b></p>		
<p>Han-Yellock® PE contact chamber with Quick Lock termination</p> <p>Wire gauge 0.5 ... 2.5 mm² AWG 20 ... 14 Stripping length 10 mm</p> 		<p><b>11 05 001 2601</b></p>		
<p>Han-Yellock® Ground terminal</p> <p>for Han-Yellock® 30</p> 		<p><b>11 12 300 5201</b></p>		
<p>for Han-Yellock® 60</p> 		<p><b>11 12 600 5201</b></p>		

Stock items in bold type