

Connectors that comply with DIN 41 612 have been in use for years for both board-to-board applications and cable-to-board applications. Their robustness and universality are legendary. The classic signal connectors are supplemented by power solutions for allowing insertion of up to 40 A. Plastic, metallized and full metal housings, used in combination with shielded or unshielded cables with a high number of poles, are available for cable-to-board connectors. HARTING offers a wide range of DIN 41 612 connectors and accessories. The following catalogue pages contain an extract from the DIN 41 612 connector program. The complete DIN 41 612 connector program for data, signals and power can be found in the complete DIN 41 612 catalogue.

Application profile:

CONNECTION TYPE		ENVIRONMENT		APPLICATION						
Board to Board	Cable/Wire to Board	IP 20	IP 65 / IP 67	Data	Signal	Power	high performance			
							Data transfer rate	Shielding	Number of contacts, contact density	Voltage, working current
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Cable termination			PCB termination			Application standard				
<i>Han-Quick Lock®</i>	<i>IDC</i>	<i>Crimp</i>	<i>THT</i>	<i>SMC</i>	<i>SMT</i>					
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>					
<i>Screw</i>	<i>Cage clamp</i>	<i>Axial screw</i>	<i>Press-in</i>							
<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>							
						<i>Separate housing</i>		<i>Integrated housing</i>		
						<input type="checkbox"/>		<input type="checkbox"/>		


CONTENTS	PAGE
Overview DIN Signal	09.04
Overview <i>har-bus</i> ® 64	09.05
Overview DIN Power	09.06
Overview shell housings	09.08

DIN  
41612

In devices for industrial automation and measurement techniques, the DIN 41 612 connector is the standard for board-to-board and cable-to-board connections as both data and power connectors. HARTING offers a wide range of standard connectors complying with DIN 41 612 and IEC 60 603-2, as well as a great selection of complementary types and customer specific solutions. Depending on the application, the 3 to 160 way connectors are offered with various termination methods, each contact capable of carrying from 2 A to 40 A.

HARTING differentiates between DIN Signal and DIN Power connectors depending on the maximum allowed working current per contact: up to 2 A for DIN Signal and over 2 A for DIN Power connectors.


HARTING's range *har-bus*<sup>®</sup> 64 features 160 contacts and is an extension of the 3 row 96 way DIN 41 612 C type range with 2 additional rows. The 5 row *har-bus*<sup>®</sup> 64 connector is 100 % forwards and backwards compatible with the type C connectors according to DIN 41 612. The design of male and female connectors allows the mating of any combination of the 5 or the 3 row variants.

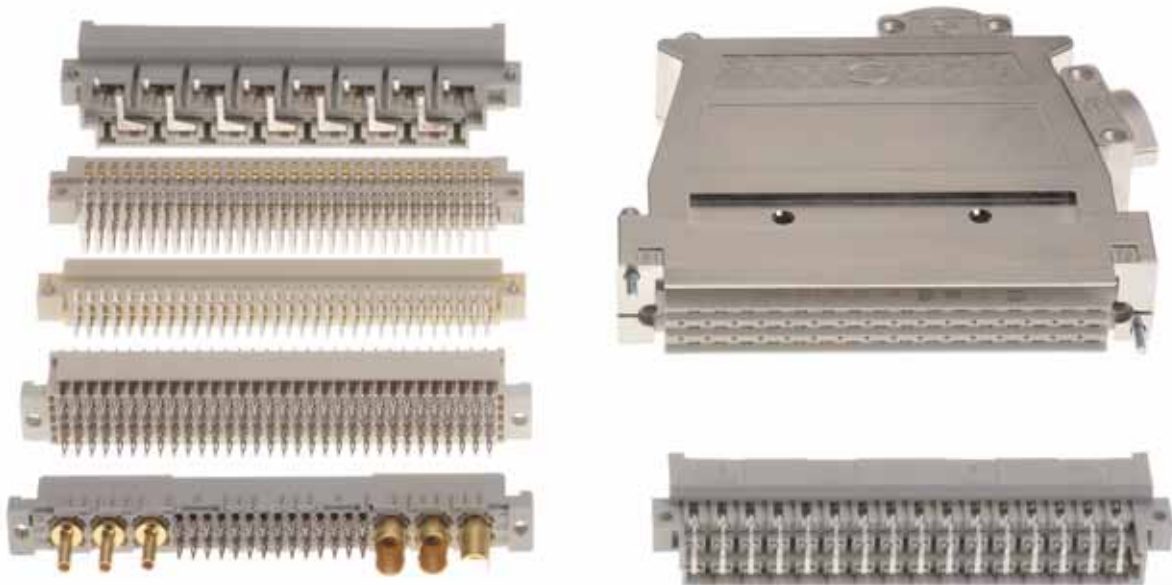

The design of the *har-bus*<sup>®</sup> 64 female allows mating of any combinations of the 5 or 3 row standard male connectors. It is also possible to mate 5 row male connectors with 3 row female connectors.

This kind of backwards compatibility allows the user the staged transition to a higher performance category and simultaneous use of daughter cards in the slots of the previous generation.

Therefore all existing bus systems, for which the 3 row C96 pin connectors are no longer sufficient, can be adapted to the latest requirements without a complete system redesign.

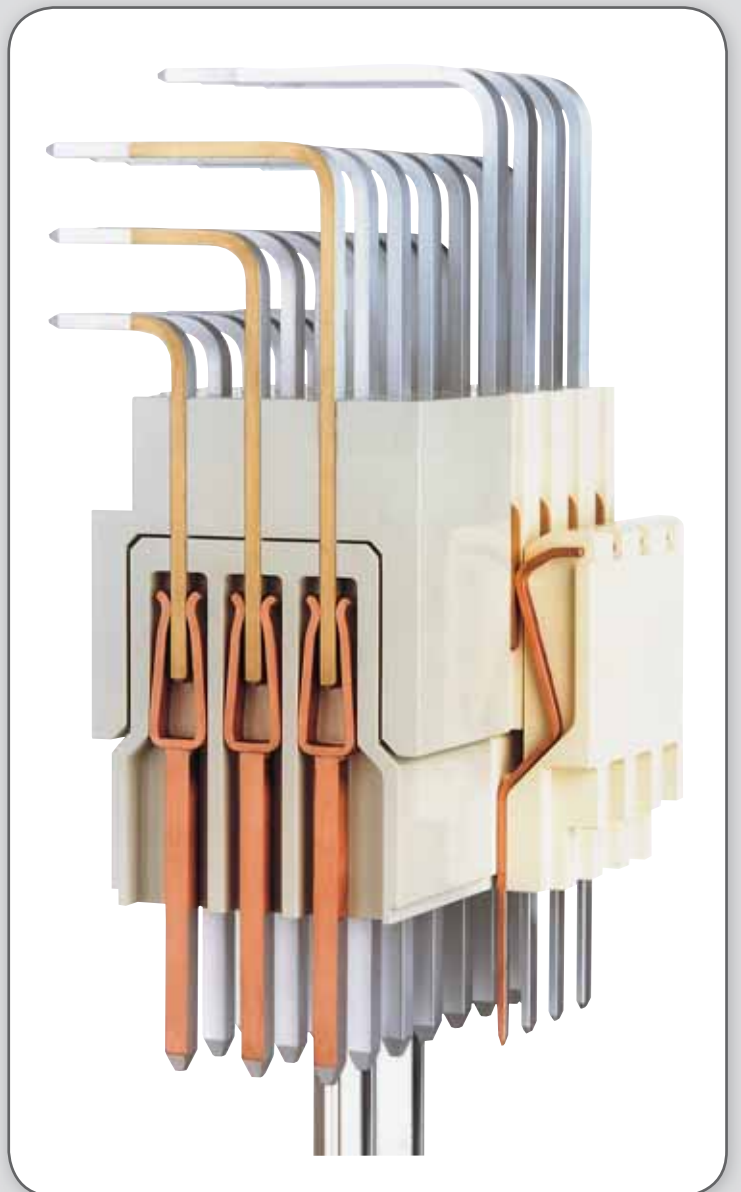

DIN  
41612


## Variety of DIN 41 612 types

Due to the large variety of complementary types, accessories and different kinds of shell housings which are available in plastic, metallized plastic and full metal, DIN 41 612 connector range is considered to be ideal for your robust, reliable and cost-efficient connectivity solution.

The special requirements of industrial electronics can be satisfied with standard types.




09  
03

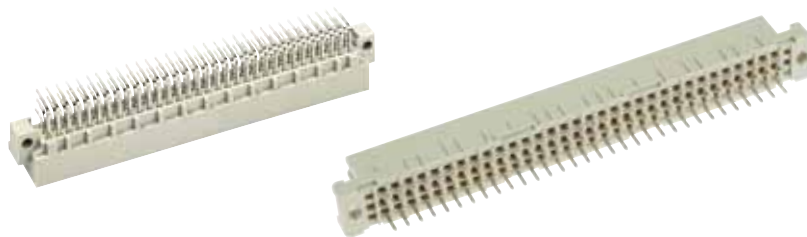

For detailed information see catalogue DIN 41 612 or [www.HARTING.com](http://www.HARTING.com)

Type	Maximum number of contacts	Image	Gender	Termination							
				Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	IDC	
B	64		male	3.0 mm							
			Interface connector U						13.0 mm		
			female	2.9 mm 4.5 mm 13.0 mm			4.5 mm 13.2 mm	X	13.0 mm	X	
			2 B	32		male	3.0 mm				
			female	2.9 mm 4.5 mm 13.0 mm			4.5 mm		13.0 mm		
C	96		male	3.0 mm	3.0 mm						
			female	2.9 mm 4.5 mm 13.0 mm		X	4.5 mm 13.2 mm 17.0 mm	X	13.0 mm	X	
2 C	48		male	3.0 mm	3.0 mm						
			female	2.9 mm 4.5 mm 13.0 mm			3.7 mm 4.5 mm		13.0 mm		
3 C	30		male	3.0 mm							
			female	2.9 mm 4.5 mm			5.3 mm				
M	78 + 2 60 + 4 42 + 6 24 + 8		male	3.0 mm							
			female	2.9 mm 4.5 mm			4.5 mm				
M flat	78 + 2 60 + 4 42 + 6 24 + 8		female	2.9 mm 4.5 mm			4.5 mm				
Q	64		male	2.5 mm 4.0 mm 13.0 mm			5.0 mm 13.0 mm		13.0 mm 17.0 mm		
			female	3.0 mm							
2 Q	32		male	2.5 mm 4.0 mm 13.0 mm			5.0 mm		13.0 mm		
			female	3.0 mm							
R	96		male	2.5 mm 4.0 mm 13.0 mm			5.0 mm 13.0 mm		13.0 mm		
			female	3.0 mm	3.0 mm						
2 R	48		male	2.5 mm 4.0 mm 13.0 mm			5.0 mm 13.0 mm		13.0 mm		
			female	3.0 mm							
R (HE 11)	96		male	2.5 mm 4.0 mm					13.0 mm		
			female	3.0 mm							
RM	96		male				5.0 mm 13.0 mm				


DIN 41612

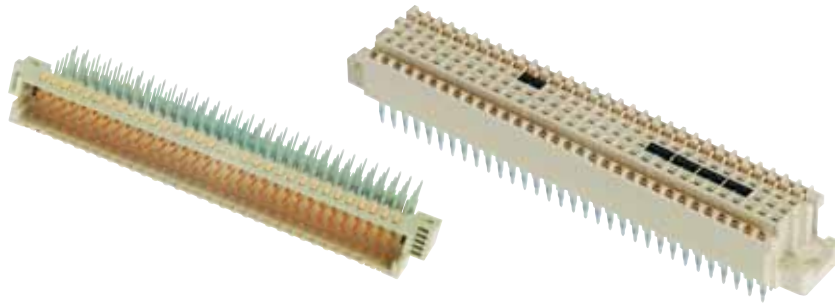

For detailed information see catalogue DIN 41 612 or [www.HARTING.com](http://www.HARTING.com)

Type	Maximum number of contacts	Gender	Termination						
			Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	IDC
harbus® 64	160	male	3.0 mm	3.0 mm					
		female	2.9 mm			3.7 mm 5.0 mm 13.0 mm	X		
		female with switches				4.5 / 5.0 mm			

## harbus® 64 system description

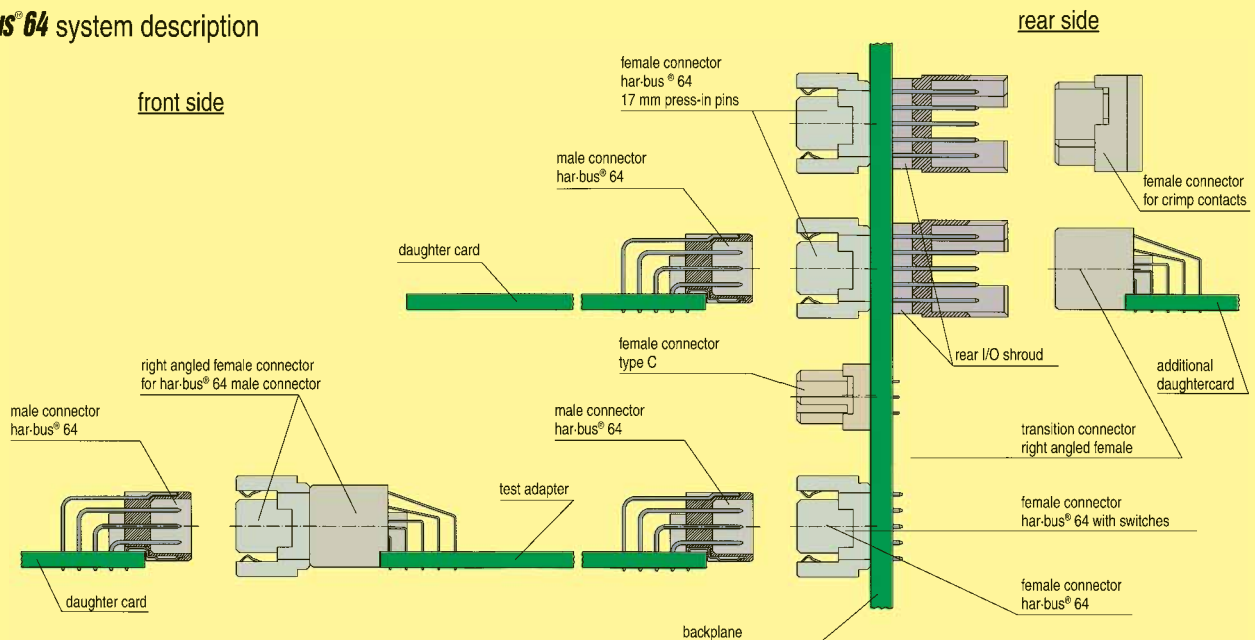

## Technical characteristics DIN Signal / harbus® 64

Number of contacts	16 – 160	Insertion and withdrawal force	16 pol. ≤ 15 N 30 pol. ≤ 30 N 32 pol. ≤ 30 N 48 pol. ≤ 45 N 64 pol. ≤ 60 N 96 pol. ≤ 90 N 160 pol. ≤ 160 N
Contact spacing	2.54	Materials	thermoplastic resin, glass-fibre filled, UL 94-V0 Liquid Cristal Polymer (LCP), UL 94-V0
Working current (all contacts are loaded)	2 A 1 A for harbus® 64 at 70 °C 1 A with insulation displacement 40 A max. type M	Mouldings	Poly Cyclohexylene Terephthalate (PCT), UL 94-V0
Test voltage $U_{r.m.s}$	1 KV	Contacts	copper alloy
Contact resistance	≤ 15 mΩ for solder and wire wrap connection ≤ 20 mΩ for crimp connection ≤ 20 mΩ harbus® 64 rows a,b,c ≤ 30 mΩ harbus® 64 rows z,d	Contact surface	selectively plated according to performance level
Insulation resistance	≥ 10 <sup>10</sup> Ω harbus® 64 ≥ 10 <sup>12</sup> Ω DIN Signal	Contact zone	
Temperature range	- 40 °C ... + 105 °C for press-in connectors - 55 °C ... + 125 °C max. + 240°C for 15 s during reflow soldering (only SMC)		



For detailed information see catalogue DIN 41612 or [www.HARTING.com](http://www.HARTING.com)

Type	Maximum number of contacts	Image	Gender	Termination							
				Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	Faston	Cage clamp
D	32		male	3.0 mm							
			female	2.9 mm 4.5 mm		X		X	20.0 mm		
E	48		male	3.0 mm							
			female	2.9 mm 4.5 mm		X	11.5 mm	X	20.0 mm		
			Interface connector I	4.0 mm							
F	48		male	3.0 mm	X						
			female	3.7 mm 4.5 mm		X		X	22.0 mm		
F Low profile	48		female	3.2 mm 4.5 mm			5.5 mm 13.0 mm				
F	48		Interface connector U						22.0 mm		
			Interface connector I	3.5 mm				X	22.0 mm		
F 9	9		male					X			
			female					X			
FM	45		male	3.0 mm				X			
			female	4.5 mm				X	22.0 mm		
2 F	24		female					X	22.0 mm		
			Interface connector U						22.0 mm		
			Interface connector I	3.5 mm				X	22.0 mm		

DIN 41612



For detailed information see catalogue DIN 41 612 or [www.HARTING.com](http://www.HARTING.com)

Type	Maximum number of contacts	Gender	Termination								
			Solder	Reflow Soldering (SMC)	Solder lug	Press-in	Crimp	Wire wrap	Faston	Cage clamp	
H	15	male	2.5 mm							X	
		female	2.7 mm 4.0 mm 5.5 mm 7.0 mm 10.0 mm							X	X
H 3	3	male	3.0 mm								
		female	4.0 mm								
MH	24 + 7	male	3.0 mm							X	
		female	4.5 mm				X	22.0 mm			
MH	21 + 5	male	3.0 mm								
		female	3.2 mm								

DIN 41612

## Technical characteristics DIN Power


Number of contacts	3 – 48	Insertion and withdrawal force	
Contact spacing	5.08 mm; 2.54 mm	Type D, E	32 pol. ≤ 40 N 48 pol. ≤ 75 N
Working current (all contacts are loaded)	Type D, E, F, F9, FM, 2F	Type F, F9, FM, 2F	24 pol. ≤ 37 N 32 pol. ≤ 50 N 45 pol. ≤ 70 N 48 pol. ≤ 75 N
	Type H, H 3	Type H	≤ 90 N
		Type H 3	≤ 20 N
Test voltage $U_{r.m.s}$	Type D, E, F, F9, FM, 2F	Materials	
	Type H	Mouldings	thermoplastic resin, glass-fibre filled, UL 94-V0
	Type H 3	Contacts	Poly Cyclohexylene Terephthalate (PCT), UL 94-V0 copper alloy
Contact resistance	≤ 15 mΩ Solder and Wire wrap connection ≤ 20 mΩ Crimp connection	Contact surface	
Insulation resistance	≥ 10 <sup>12</sup> Ω	Contact zone	selectively plated according to performance level hard silver plated or gold plated
Temperature range	- 40 °C ... + 105 °C Press-in connector - 55 °C ... + 125 °C max. + 240 °C for 15 s during reflow soldering (only SMC)		



# Shell housing overview




For detailed information see catalogue DIN 41 612 or [www.HARTING.com](http://www.HARTING.com)

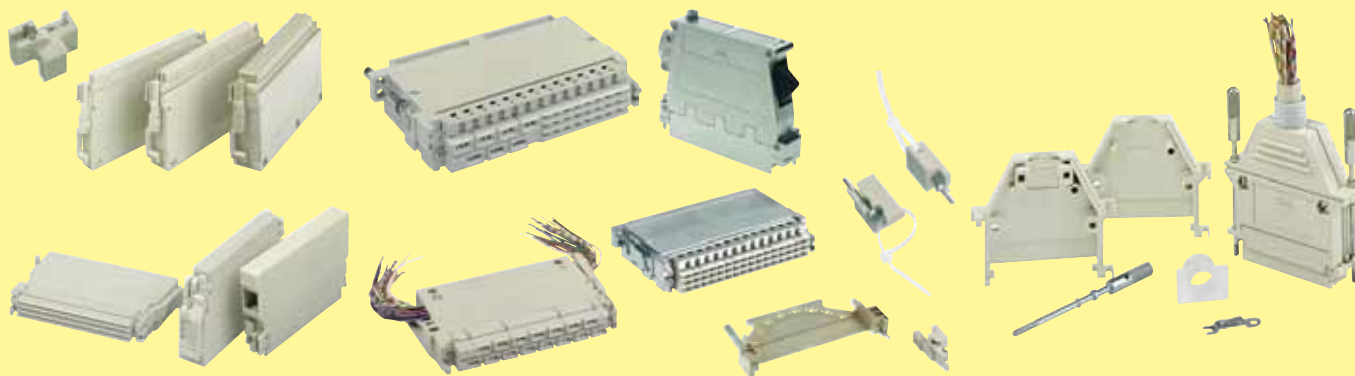


	Shell housings								Open hood			Junction element O	Locking lever O
	A	B	C	D15	D20	D20 metallized	D20 metal	A für 2F	2F	G			
Number of cable entries	2	4	4	2	4	4	4	1	2	4	2	2	
for screw fixing	X	X	X	X	X	X	X	X	X	X	X		
for fixing with locking lever	X	X	X	X								X	
for straight pcb connector			X										
for front side of the rack	X	X	X	X	X	X	X	X	X	X	X	X	
for pin shrouds			X										
for Interface connector I or U	X	X	X	X				X	X	X	X		
EMC						X	X						
IP 20	X	X	X	X	X	X	X	X	X	X	X	X	
Coding included in shell housing					X	X	X						
for types	B / Q		X										
	C / R		X										
	<i>harbus 64</i>		X										
	D		X										
	E		X							X			
	F	X	X		X	X	X	X			X	X	X
	2F							X	X				
	H		X		X	X	X	X			X		X
MH		X		X	X	X	X			X		X	

Pin shrouds	for types					
	C	2C	R	2R	<i>harbus 64</i>	E
screw fixing	X	X	X	X		
press-in fixing	X	X	X	X	X	X

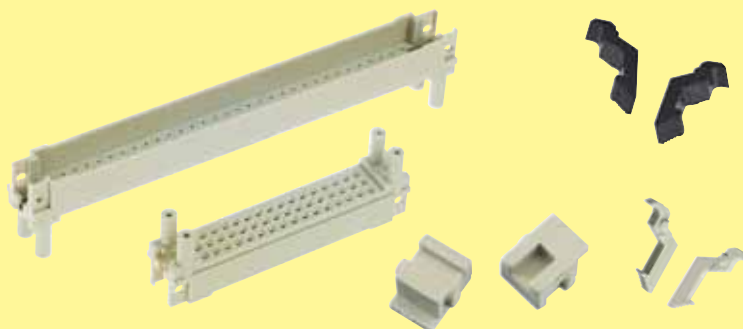


DIN 41612


## Application 1

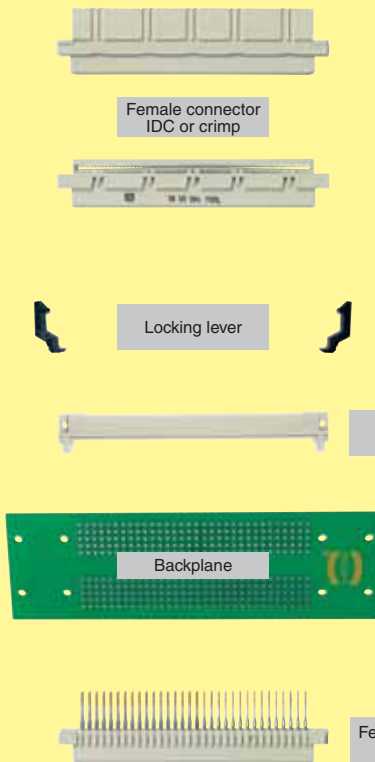

## Application 2

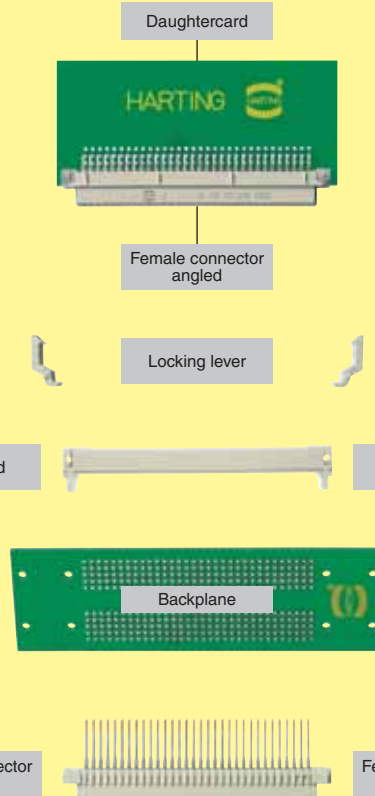

## Application 3

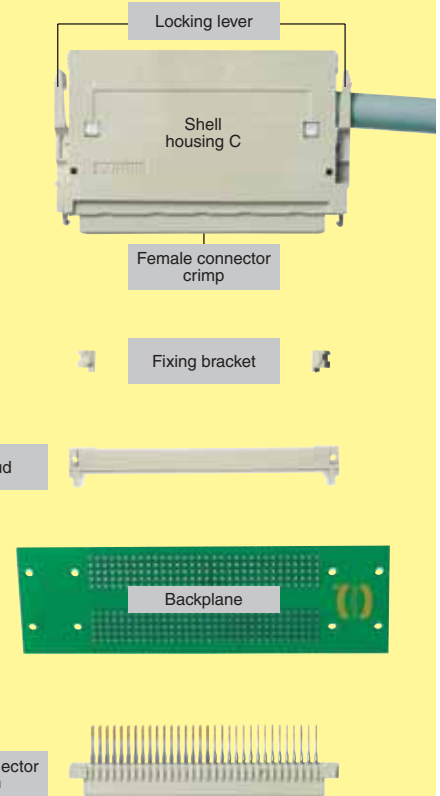

# Male and female connectors with pcb fixings

## Snap-in clips

In the soldering process, all component terminations including the snap-in clips are soldered and therefore mechanically secured. This provides mechanical protection for the soldered contacts during mating and unmating of the connector.

Mouldings with snap-in clips offer the following advantages:

- Cost reduction when compared with the screw or rivet assembly methods due to the soldering of the clip along with other components in one process.
- The orientation of the clip after soldering in the plated through hole provides mechanical protection against the tensile forces arising from the mating and unmating of the connector.


It is possible to supply the majority of male and female connectors with solder termination with snap-in clips.

For pcb thickness  
1.6 ± 0.2 mm  
Ø = 2.8 + 0.1 mm




Mounting force  
40 - 60 N

For pcb thickness  
1.6 - 4.0 mm  
Ø = 2.8 + 0.1 mm

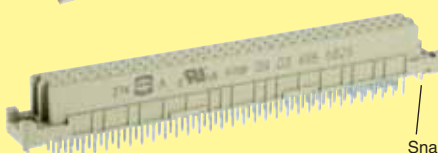

Snap-in clip

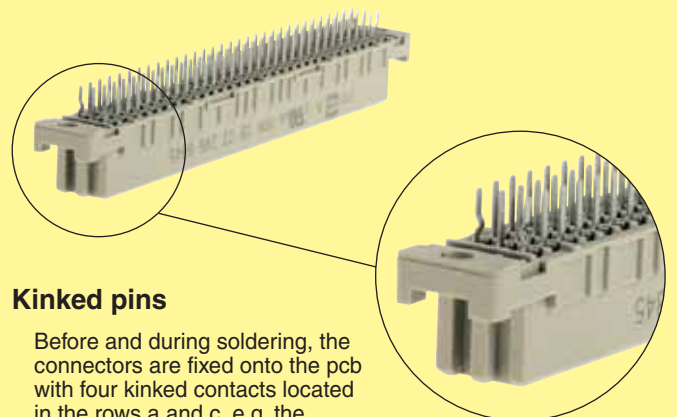

## Kinked pins

Before and during soldering, the connectors are fixed onto the pcb with four kinked contacts located in the rows a and c, e.g. the positions a1, c1, a32 and c32 for a fully loaded connector.

Connectors with kinked pins are a reliable alternative for female connectors with straight terminations because no additional elements like screws, rivets or clips are necessary.



Cross section of a connector with kinked contacts assembled to a pcb

